



IDEAL SHIELD
2525 CLARK STREET
DETROIT, MICHIGAN
48209
1-866-825-8659

SPECIFICATIONS:

PRODUCT DESIGNED TO STOP A 10,000LBS FORKLIFT GOING 5MPH
*EXCLUDES ANCHORS AND CONCRETE CONDITIONS
PRODUCT FLEXES UP TO 18 DEGREES,
SOFTENS IMPACT AND REDUCES DAMAGE TO CONCRETE

-**SIZE:** PIPE CAN BE CUT TO DESIRED HEIGHT - STANDARD 49 1/2"
BASE - 16.5" ROUND OR 13.5" SQUARE

-**MATERIAL:** 6" STEEL PIPE
ELASTOMER BASE
COVER - YELLOW STANDARD



-**FINISH:** BASE FINISH STANDARD COLD GALV OR GALVANIZED

BOLLARD COVER FOR PRODUCT AVAILABLE IN COLORS BELOW UPON REQUEST
COLOR: 13 STOCK STANDARD COLORS AVAILABLE
(285 BLUE, BLUE, URBAN BRONZE, RED, YELLOW, WHITE, BROWN, FOREST GREEN, GRAY,
ORANGE, 402 GRAY, BLACK, LIME GREEN)
ANY COLOR MATCH AVAILABLE WITH PANTONE NUMBER


-INSTALLATION:

1. BOLLARD ASSEMBLED AS DIAGRAM BELOW
2. SET BOLLARD AND MARK HOLES FOR DRILLING
3. DRILL HOLES IN CONCRETE FOR 4 OR 8 - 3/4 INCH ANCHORS
4. SECURE IN PLACE

BOLLARD COVER COLOR CHART

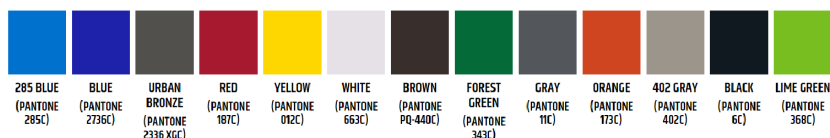


IDEAL SHIELD 6" BOUNCE BACK BOLLARD

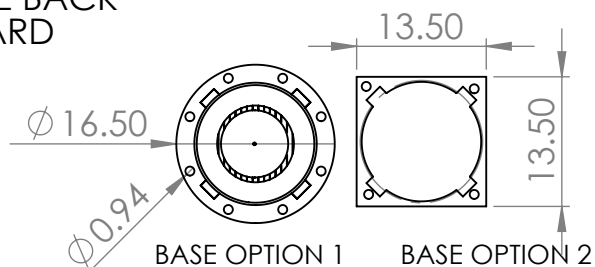


UP TO 18
DEGREES

TOP VIEW

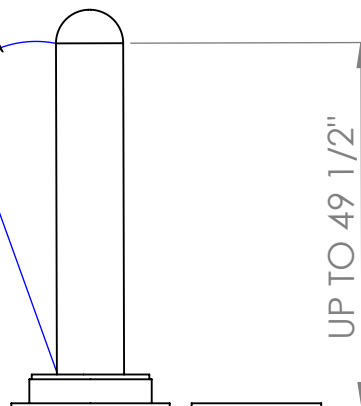

FRONT VIEW

BASE INSTALL ORDER

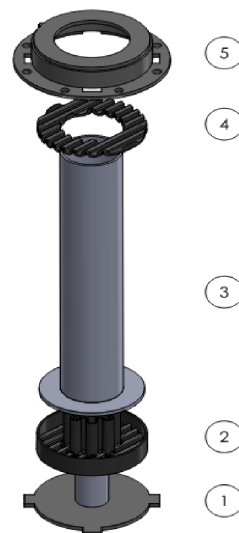

TITLE:
IDEAL SHIELD 6" BOUNCE
BACK BOLLARD

DWG NO.

BBB-06-ASSY-01

A

SCALE: 1:20

SHEET 1 OF 1

THIS DRAWING AND ALL THE INFORMATION THEREON
IS THE PROPERTY OF THE IDEAL SHIELD, IS CONFIDENTIAL
AND MUST NOT BE MADE PUBLIC, NOR COPIED, NOR
USED, TO THE DISADVANTAGE OF SAID IDEAL SHIELD
AND IS SUBJECT TO RETURN ON DEMAND
COPYRIGHT 2003 IDEAL SHIELD