





IDEAL SHIELD
2525 CLARK STREET
DETROIT, MICHIGAN
48209
1-866-825-8659
IDEALSHIELD.COM

IDEAL SHIELD TWO LINE ALUMINUM PICKET HANDRAIL WITH BASE PLATE

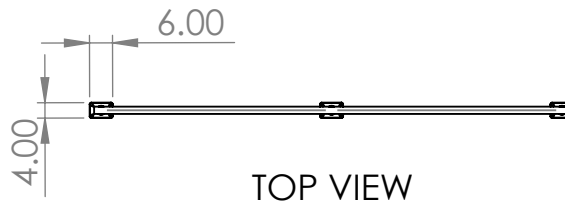


TOP VIEW

CONTINUOUS RUNS
AND CUSTOM LAYOUTS AVAILABLE
WITH MECHANICAL SPLICES (NO WELDING)

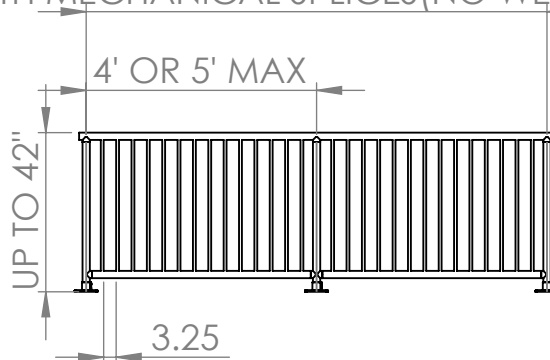

FRONT VIEW

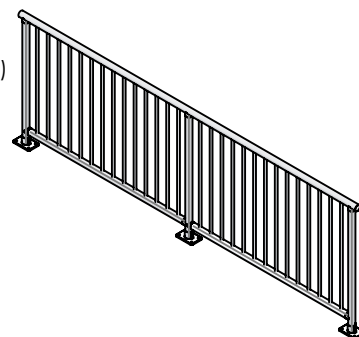

SPECIFICATIONS:

PRODUCT DESIGNED FOR OSHA OR IBC FALL PROTECTION, WALKWAYS
PRODUCT MECHANICALLY SPLICED FOR EASY INSTALL
2 HORIZONTAL RAILS
HIGHLY CUSTOMIZABLE
STANDARD SECTIONS OR AS ORDERED SPECIFIC LAYOUT AVAILABLE

-SIZE:

42" TYPICAL OTHER SIZES AVAILABLE UPON REQUEST
4"X6" BASE PLATE

-MATERIAL:

1 1/2" SCH 40 ALUMINUM PIPE RAILS
1 1/2" SCH 80 ALUMINUM PIPE RAILS
ALUMINUM BASEPLATE

-FINISH/COLOR:

RAIL ANODIZED ALUMINUM
OPTIONAL POWDERCOAT

-INSTALLATION:

1. SET FIRST SECTION OF RAIL IN DESIRED LOCATION
2. USING BASEPLATE AS TEMPLATE MARK HOLES IN CONCRETE
2. DRILL HOLES IN CONCRETE FOR 3/8" DIA ANCHORS FOR ALUMINUM BASEPLATE(4 PER BASE)
3. PLACE ANCHOR
4. SECURE ANCHORS IN PLACE
5. CONTINUE AS NEEDED WITH CONTINUOUS SPLICED SECTIONS AND BOLT TOGETHER

ALUMINUM PICKET HANDRAIL

PART NUMBER
DESCRIPTION

TITLE:

TWO LINE ALUMINUM
PICKET HANDRAIL
WITH BASEPLATE

DWG NO.

HRI-PICKET-2-L-H-BP

A

SCALE:1:50

SHEET 1 OF 1

THIS DRAWING AND ALL THE INFORMATION THEREON
IS THE PROPERTY OF THE IDEAL SHIELD, IS CONFIDENTIAL
AND MUST NOT BE MADE PUBLIC, NOR COPIED, NOR
USED, TO THE DISADVANTAGE OF SAID IDEAL SHIELD
AND IS SUBJECT TO RETURN ON DEMAND
COPYRIGHT 2003 IDEAL SHIELD

LENGTH

HRI-PICKET-#LINES-L-H-R

OF RAILS

HEIGHT